

OVERLOCK, COVERSTITCH PORTABLE



CM 4 (DIFFERENTIAL FEED)

PORTABLE, OVERLOCK STITCH MACHINE – 4 THREAD, 2 NEEDLE


Perfect for sample rooms, alteration rooms, tailor's shops, drapery shops, dry cleaners, department stores, dress makers and the home

COLOR CODED THREADING

- FLIP-UP CARRYING HANDLE
- FLAT BED OR CYLINDER BED
- LOCKING STITCH LENGTH REGULATOR
- BUILT-IN SEW LIGHT
- ELECTRONIC FOOT OPERATED SPEED CONTROL
- 110 VAC, 1-PHASE, 60 Hz.
- {220 VAC, 1-PHASE AVAILABLE}

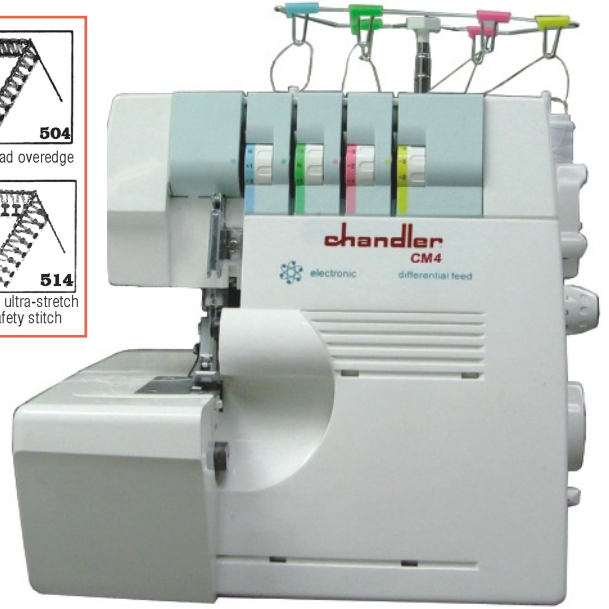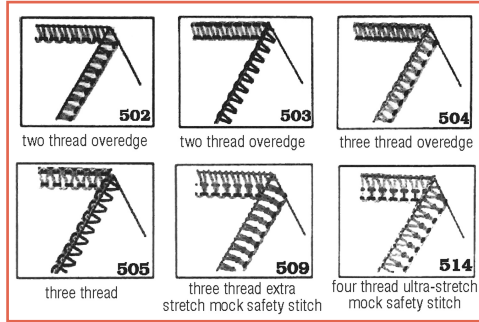

SPECIFICATIONS	Speed, Max. (S.P.M.)*	1300
	Clearance Under Foot	15/64" (Up to 6 mm)
	Stitch Length, Max.	24 s.p.i. (1mm - 4mm)
	Needle	#2054, 10#-16#
	Overedging Stitch Width	(3 - 6.7 mm)
	Max. Stitch length	(1~4mm)
	Max. presser foot lift	(4.5mm)



TYPE 514 STITCH


CM 5
PORTABLE "Coverlock"

NOW WITH INSTRUCTIONAL VIDEO ON CD DISK!
5-thread, 4-thread, 3-thread, 2-thread Configuration


- COVERSTITCH - SAFETY STITCH -
- OVERLOCK - PEARL STITCH -



- 5-4-3-2 Thread Configuration
- Differential Feed
- Adjustable Cutting Width
- Color-Coded Lay-In Tension
- Auto Tension Release
- Cover Hem and Lower Looper Auto Threaders
- Attachable Clean Pocket
- 10-Piece Accessory Kit
- Maximum speed of 1,300 stitches per minute
- Electronic speed control
- Adjustable stitch length (2 mm to 4 mm)
- Extra presser foot lift
- Built-in light, ruler, handle and seam guide
- Soft dust cover

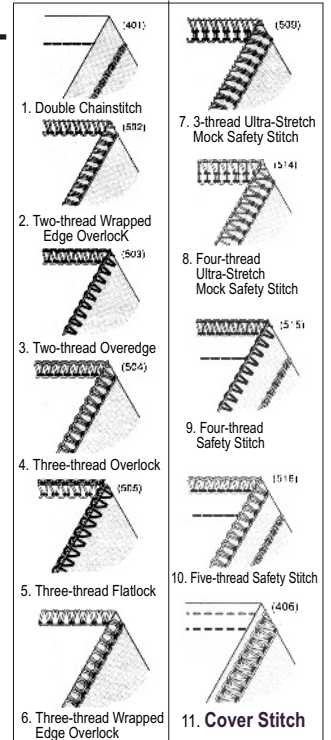

FLAT BED OR CYLINDER BED

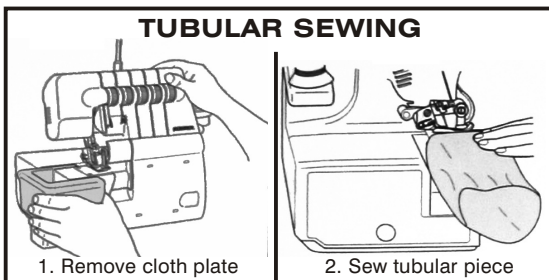

SPECIFICATIONS	Speed, Max. (S.P.M.) *	1300 *
	Clearance Under Foot	4.5 mm
	Stitch Length, Max.	4 mm
	Overedging Width	3 - 7.7 mm
	Coverstitch Width	4 mm
	Stitch Type	(see chart at left)
	Shipping Weight	21 lbs.

* Speed depends on materials, thread and operation
Specifications subject to change without notice.